


ASSEMBLY AND OPERATION

PARTS LIST

Qty	Description
A	1 AerBag Cargo Bag
B	2 T-Handle Knobs
C	2 2" Fastener Bolts

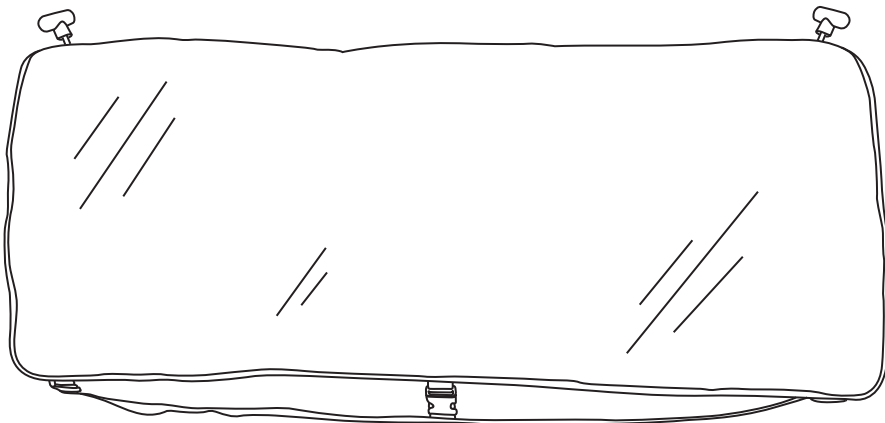

Preparation: Remove the AerBag and hardware from packaging. The AerBag sits on either side of the wings of any brand model in the Lets


Go Aero family of Vme Racks. Ready your Vme by choosing your preferred location and removing the Wheel Cradles and Wheel Stops from that side (Wheel Stops and Cradles on the unused side of the Vme Wings do not need to be removed and can still be used for bicycles and gear).

TIP: For easy gear access, use the side located furthest from the vehicle.

Step 1: Locate the two metal Eyelets on either side of the top of the AerBag (two additional eyelets are located at the bottom of the Bag for drainage, Do not use these locations for fastening). Unzip the AerBag and insert one of the provided 2" Fastener Bolts through an Eyelet from the interior to the exterior. The threaded portion of the Bolt should be on the exterior of the AerBag when through. Repeat Step 1 on the opposite side of the cargo bag.

Step 2: With both Fastener Bolts in place, attach the AerBag to the rack by inserting each Bolt through the wings at the highest hole position with the AerBag front facing away from the rack.

Step 3: Using the T-Handle Knobs, secure the Bolts and the AerBag to the rack. Adjust bag and tighten the knobs to confirm a secure fit.

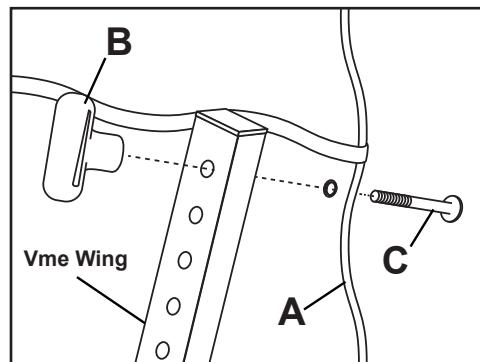

One Year Limited Warranty:

AerBag is warrantied to be free of manufacturer defect for one year from date of purchase to the original owner.

⚠ WARNING

Always check that the AerBag and stored contents are fully secured to the carrier before transit to avoid loss or damage.

⚠ WARNING

Maximum weight capacity is 80 lbs.
DO NOT EXCEED MAXIMUM. Always balance load by placing gear in center of the AerBag first.