


PARTS


QTY. DESCRIPTION

A	1	EXTENSION TUBE
B	1	SILENT HITCH PIN®
C	1	SPRING NUT
D	1	FLAT WASHER
E	1	SPLIT WASHER
F	1	LOCK & KEYS

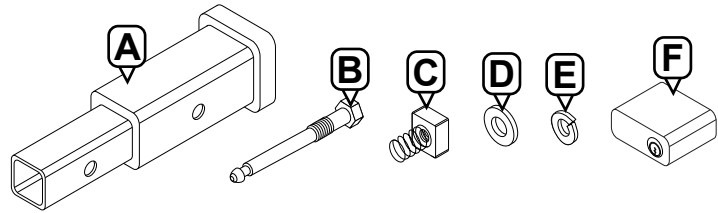


STEP 1:

Insert the Spring Nut [C] into the small end of the Extension Tube [A]. Align the Spring Nut's coil with the hitch receiver pin hole. [Fig. 1]

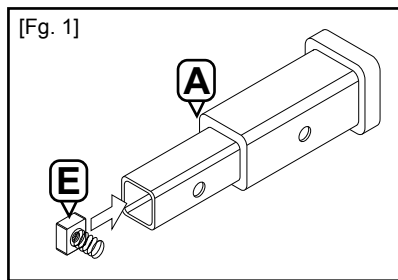

STEP 2:


With the Spring Nut [C] compressed within the Extension Tube [A], slide the small end of the Extension Tube into the vehicle's hitch receiver and align the hitch pin holes. [Fig. 2]

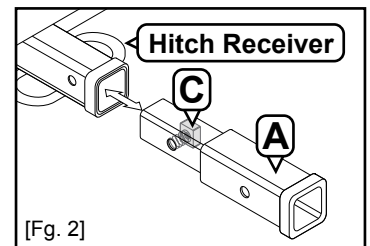

STEP 3:


Insert the Silent Hitch Pin [B] with the Split Washer [E] and Flat Washer [D] into the hitch pin hole and thread the pin through the threaded *block side* of the Spring Nut [C] as shown.

Using a **7/8" wrench**, fully tighten the Pin [B] so it is snug and tight.

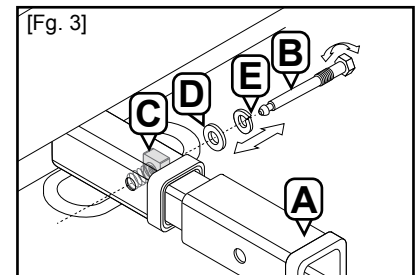

STEP 4:

Press & apply Lock [B] onto the end of the Silent Hitch Pin [B]. [Fig. 4]

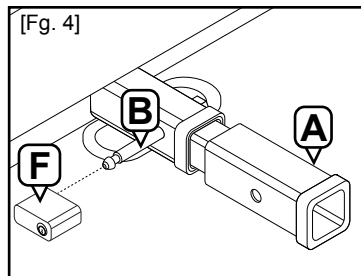

WEIGHT CAPACITY & SAFE USE

- 350 lbs load carrying limit (defined as hitch accessory + payload combined weight)
- For use on receiver style hitch only; not warranted for bolt-on bumper style mount, "D.I.Y" or any other variation
- Not for towing

For Product Registration, or For More Product Information & Accessories, Visit our Website - www.LetsGoAero.com
For Technical Support & Product Questions Contact Us at 877-464-2376 or 719- 630-3800
Email: SUPPORT@LETSGOAERO.COM

⚠ WARNING:
Do NOT exceed 350lbs load carrying limit. Always confirm Silent Hitch Pin is fully tightened with wrench and secured before transit.